

Insulation Sealing Solution For Doors And Windows

Insulation sealing solution for doors and windows includes EPDM foam seals, EPDM solid seals PU foamed seals, PVC seals and TPE seals. Materials provide excellent heat/cold insulation, smoke insulation, acoustic insulation sealing performance for door perimeter and bottom.

>100 sections

A selection of over 100 different types insulation seals

Customizable

Support for customized materials and shapes





REPDM SERIES RUBBER SEAL

REPDM series rubber seal is a superior seal material to prevent the heat cold wind noisy moisture gases dust and worm. Product has long-lasting performance and long service life even in harsh environmental conditions. After long time pressing, the material is able to recover its original shape quickly and its sealing effect is maintained.

EPDM foaming rubber

Sound insulation and noise reduction

Energy saving - cold and heat resistance

Weather and aging resistance

Easy installation with strong self-adhesive

Customized designs are available

For all kinds of security door, wooden door and window gaps.

Color is optional brown white black grey














Various models and sizes available





Different lengths in different packages





REPDM SERIES RUBBER SEAL



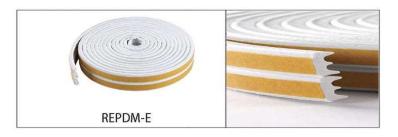


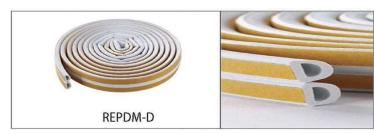

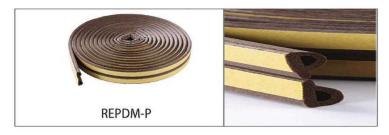

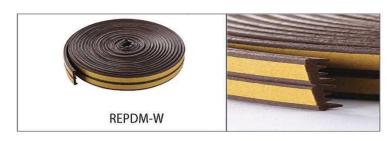























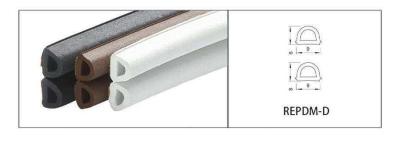





REPDM SERIES RUBBER SEAL

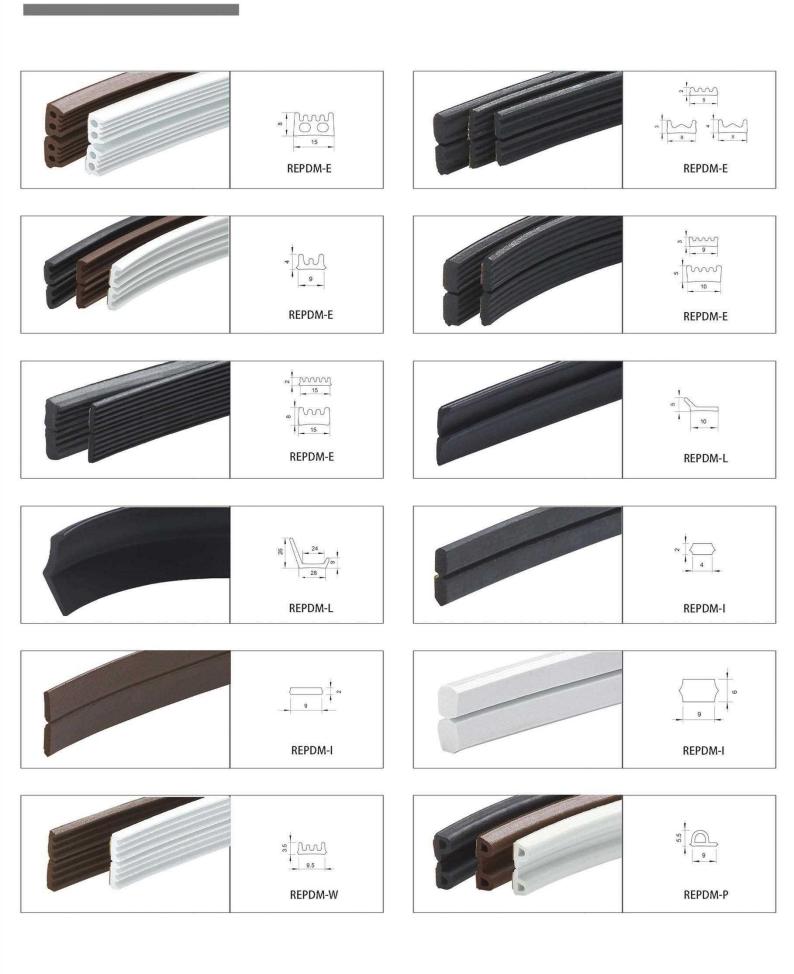



RY-EPDM SERIES WEATHER SEALING STRIP

RY-EPDM sealing strip adopts high-temperature shaping microwave vulcanization process, with good tensile and compression deformation resistance, air aging resistance, ozone aging resistance and a wide range of operating temperature (-50C-+150 $^{\circ}$ C) and other properties, long service life. For different shapes, different materials or different application scenarios characterized by demand, can meet the needs of design and development and use.

Heat and cold resistance Resistant to air and ozone aging Wide operating temperature range Meets the needs of design development and use























Meets a wide range of design development and utilization needs





Good tensile and compressive deformation resistance


RY-EPDM SERIES WEATHER SEALING STRIP

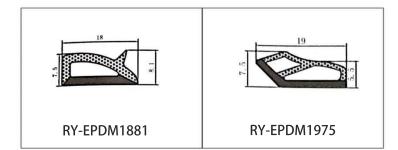


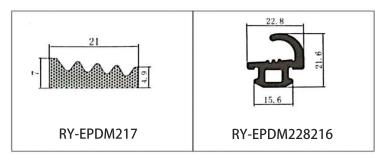








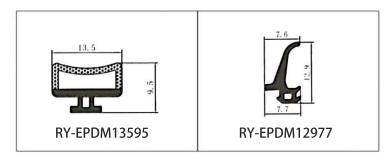











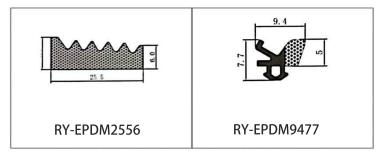


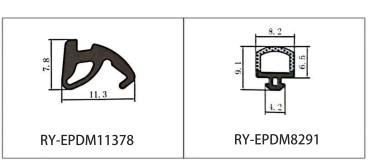

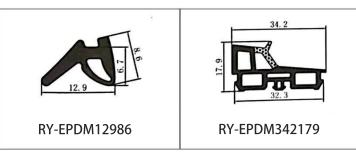


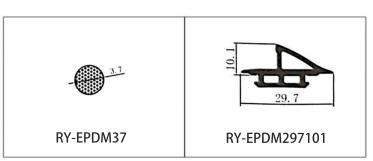

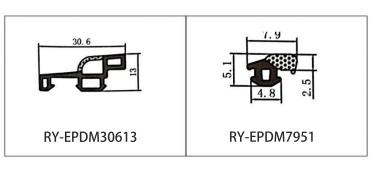


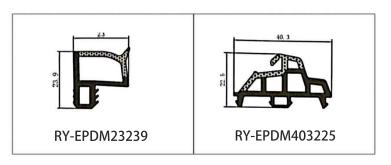


RY-EPDM SERIES WEATHER SEALING STRIP




RY-EPDM4110




RY-EPDM333212




RY-EPDM159135




RY-EPDM3347




RY-EPDM20219



RY-EPDM334203




RY-EPDM8289




RY-EPDM295266




RY-EPDM1510



RY-EPDM6791



RY-EPDM59222




RY-EPDM75101




RY-EPDM339155




RY-EPDM64148




RY-EPDM2312




RY-EPDM1514




RY-EPDM41613




RY-EPDM537517



RY-EPDM389144



RY-EPDM81123



RY-EPDM338157





RY-EPDM SERIES WEATHER SEALING STRIP FOR ALUMINUM-CLAD WOOD DOOR AND WINDOW

RY-EPDM series aluminum alloy coated wooden door and window waterproof seal strip can realize seamless corner joining process and better sealing effect. The combination of dense and foam technology, reasonable design will maximize the effect of heat preservation and sound insulation. Excellent aging-resistant materials, adaptable to a variety of working environments. A variety of production processes, can provide the best design program in a timely manner.

Working temperature in -40°C-150°C
Service life can reach more than 25 years
Thermal and acoustic insulation to the extreme
Clip line production to prevent transition stretching
Seamless corner joining process for better sealing effect
Resistant to aging and adaptable to a variety of working environments

Colors can produce colored raw materials, avoiding a single black product






Excellent workmanship, thermal and acoustic insulation to the extreme





Seamless corner joining process for better sealing effect





RY-EPDM SERIES WEATHER SEALING STRIP FOR ALUMINUM-CLAD WOOD DOOR AND WINDOW

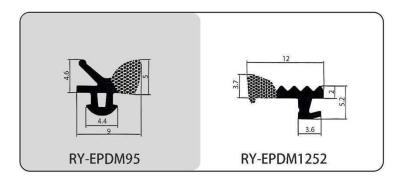


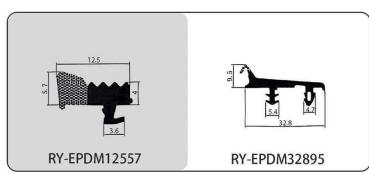


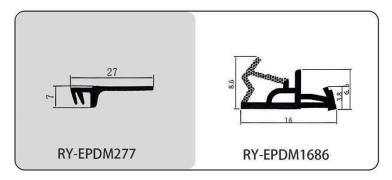


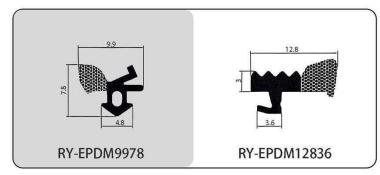

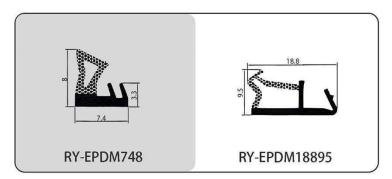

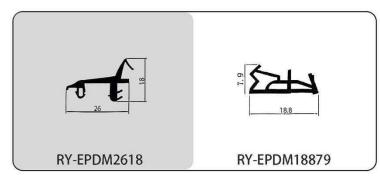

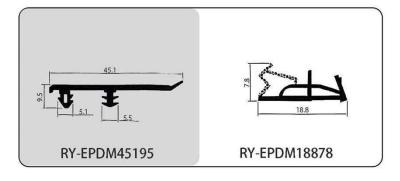

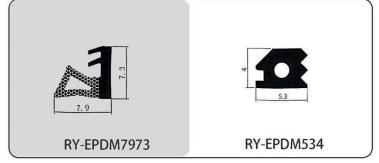



RY-EPDM SERIES WEATHER SEALING STRIP FOR BRIDGE ALUMINIUM


RY-EPDM series weather sealing strip realize seamless corner joining process, sealing effect is more excellent. The combination of dense and foam technology, reasonable design will achieve the best heat preservation and sound insulation effect. Excellent aging-resistant materials can be adapted to a variety of working environments. A variety of production processes, can provide the best design in a timely manner. Colorful raw materials can be produced to meet a variety of design needs.

Working temperature in -40°C-150°C
Service life can reach more than 25 years
Thermal and acoustic insulation to the extreme
Clip line production to prevent transition stretching
Seamless corner joining process for better sealing effect
Resistant to aging and adaptable to a variety of working environments







Multiple production processes provide optimal design solutions





Seamless corner jointing process for better sealing effect


RY-EPDM SERIES WEATHER SEALING STRIP FOR BRIDGE ALUMINIUM

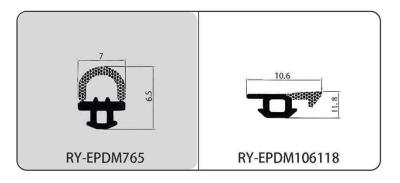


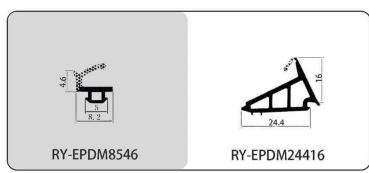


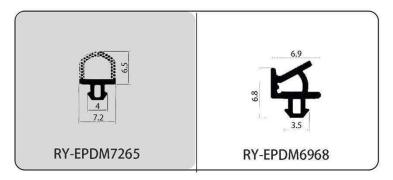


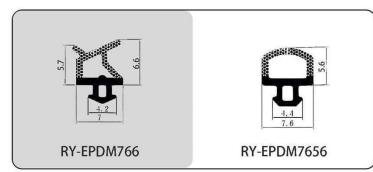


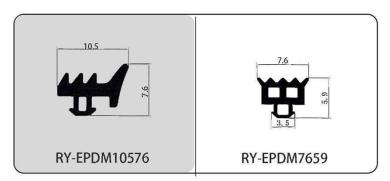


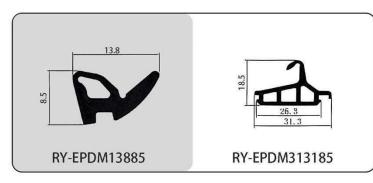

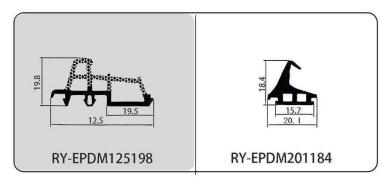

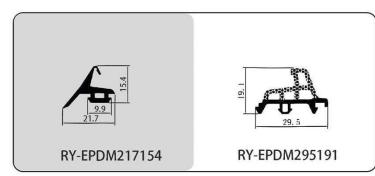


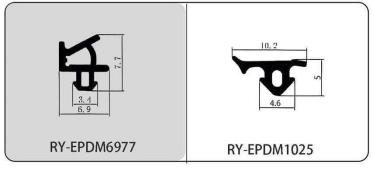

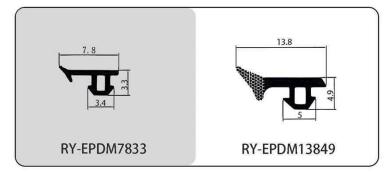



RY-EPDM SERIES WEATHER SEALING STRIP FOR BRIDGE ALUMINIUM

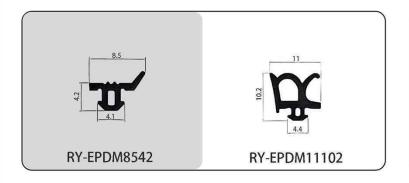












REPDM-C weldable sealing strips, mainly used in building window and door facade systems, combines the advantages of EPDM material and efficient processing into one, no hardening of adhesive corners in welding, strong thermal insulation, outstanding long-lasting sealing and excellent acoustic and thermal insulation properties, long service life, high elasticity and long-term elastic recovery.

Clean and hygienic indoor climate
Physical and chemical properties of exposure
Creating quiet and energy efficient living spaces at home
Soft and completely sealed corners
High tolerance compensation for multiple glazing

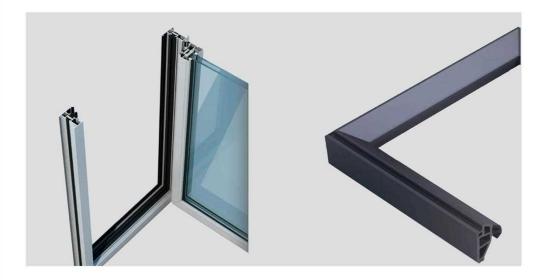



No gum angle hardening during welding



One-piece adhesive tape for complete sealing



Low-energy door frame EPDM sealing tape is made of high-quality imported rubber from abroad, adopting automobile and production technology, the whole frame is vulcanized and welded as a whole, and the corners are perfectly fitted to achieve the ultimate sealing.

Airtightness to class 8 Watertightness class 6 Wind and dust resistance Sound and heat insulation Strong thermal insulation








Meets a wide range of design development and utilization needs





Good tensile and compressive deformation resistance

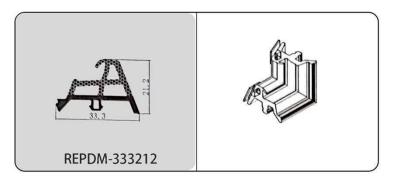


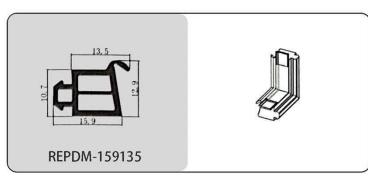


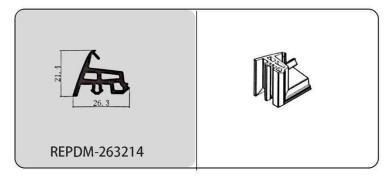


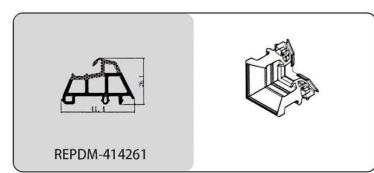


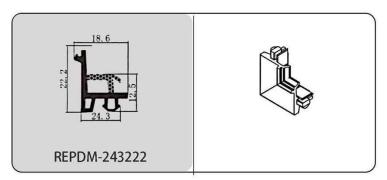


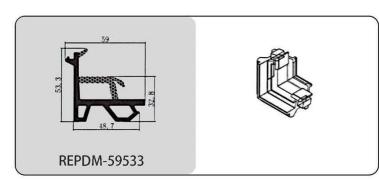


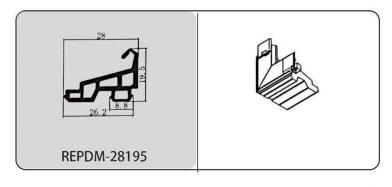


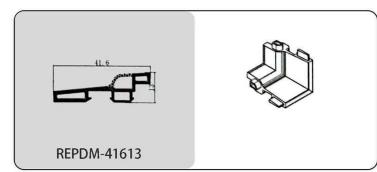


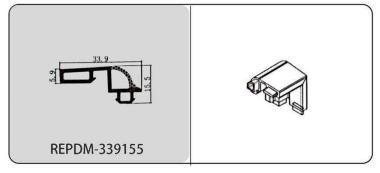


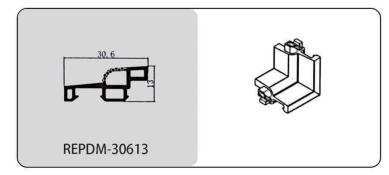


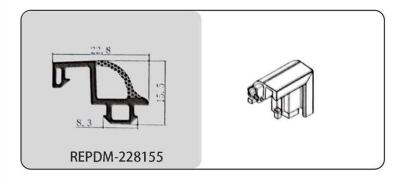


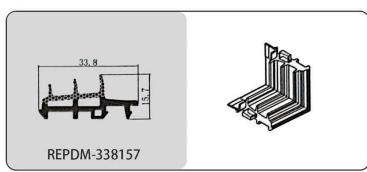


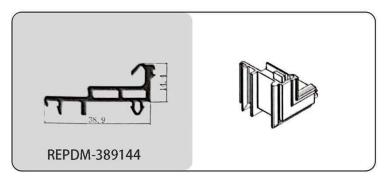


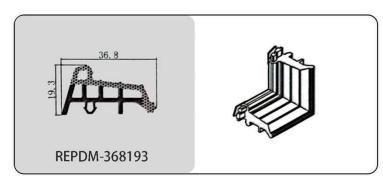

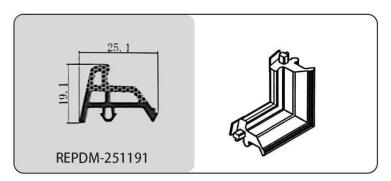

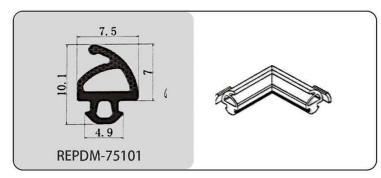

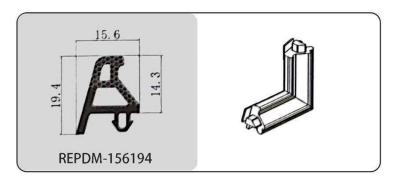

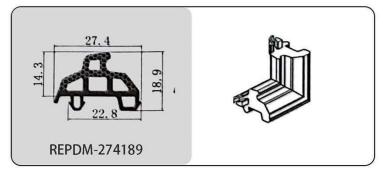



REPDM-CK SERIES GARAGE DOOR BOTTOM SEAL

The garage door bottom seal effectively enhances the garage experience and environmental quality through a variety of functions such as waterproofing, dustproofing, insect-proofing, windproofing soundproofing, light-proofing and protecting the garage door, and is an important device to keep the garage interior dry, clean, safe and comfortable.

Anti-crash: Provides cushioning when closing the door

Soundproofing: Reduces noise from outside

Waterproof: Effectively prevents rain and ground water from entering

the garage through the doorway.

Simple installation: simple design, easy to install

High-quality EPDM material is wear-resistant and aging-resistant






REPDM-CK01 Composed of EPDM material, easy to install on the bottom of the garage door for waterproof soundproofing, vibration damping and sealing.



REPDM-CK02 Made of EPDM material, it can be easily installed on the bottom and sides of the garage door for vibration dampening, pest control, soundproofing and sealing. Can be used in combination with REPDM-CK01



REPDM-CK03 Made of PVC material, it can be easily installed at the bottom of the garage door for vibration damping, windproof waterproof, insect-proof and sealing.



Material: PU foaming covered by PE

Beautiful surface Resistance to UV


Resistance to ozone erosion

Resistance to water and oil


Weather and aging resistance

Wide temperature range -40 to 90

Stable performance and long service life





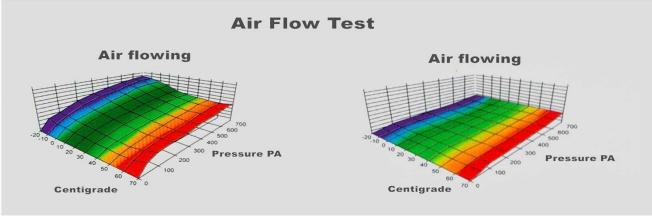

Installation Diagram
















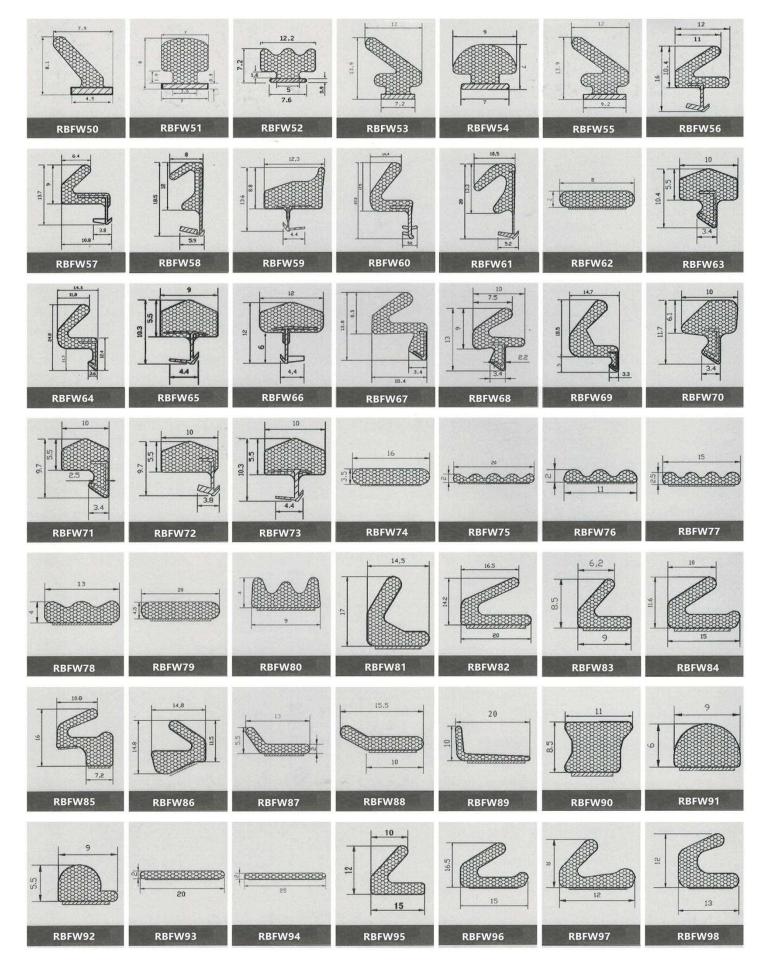







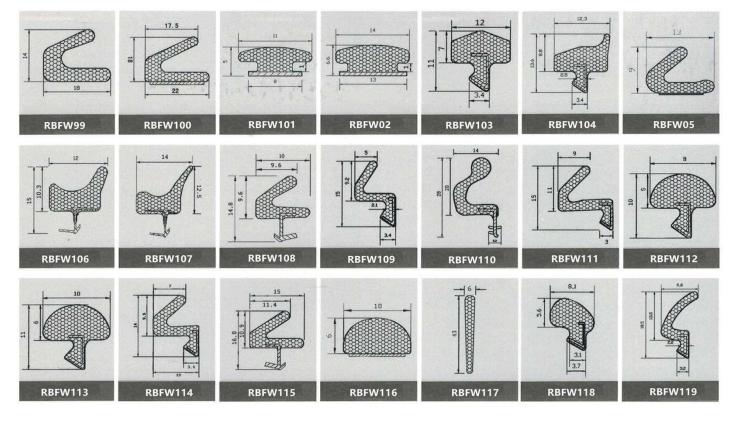











RBFW SERIES PU FOAMED ACOUSTIC SEAL

RBF series weather stripping, using the international leading sealing concept and advanced production technology, made through the composite application of a variety of polymer materials, can adapt to a variety of extreme weather, and on the basis of the original products increased fire expansion series, and access to the national mandatory product certification, able to meet more needs.

Good weathering and UV resistance Excellent resilience Greater compression Wider range of sizes available Better tensile and anti-shrinkage properties





















Adoption of international leading sealing concept and advanced production technology



Made of a variety of polymer materials composite application



RBFW SERIES PU FOAMED ACOUSTIC SEAL

Wrap-around PU high soundproof sealing series, using the international leading sealing concept and advanced production technology, through a variety of polymer materials composite application made to adapt to a variety of extreme weather, and increase the fire expansion series, the difference between EPDM and PVC sealing strips, the product airtightness is stronger, sound insulation is more outstanding.

Sound insulation class V in combination with application scenarios National fire protection certification has been obtained Compression permanent deformation less than 5% Resistant to high and low temperatures from -60°C to +70°C No sticking, no hardening, no color fading Strong fatigue resistance More advantages in watertightness and airtightness





RBFW is more advantageous in terms of watertightness and airtightness



Enclosed soundproofing performance is even more

RTXT made of the high quality flexible modify PVC/TPE material, it is a high elastic doorstop frame seal suitable for wooden door groove frame. It has the excellent sound insulation, dust insulation and decorative effect. Because of the good elastic and flexibility characteristic, it has stable shope with long-term use life and can effectively prevent the noise dust wind and rain.



































































































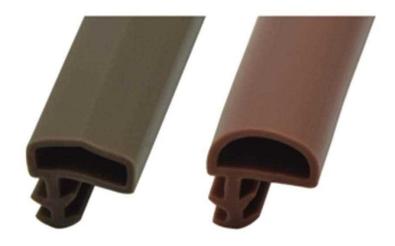







































































































































































































RRYSJJ SERIES ACOUSTIC AND SMOKE CORNER SEAL

RRYSJJ series acoustic and smoke corner seal provides the acoustic smoke and heat (cold &hot) sealing for the gaps of door edges and frames.

Unique easy installation
Product comes with strong self-adhesive
Minimum gap seal size 3mm/4mm
Excellent compression and deflection performance
Reduced door closing force due to a low co-efficient material of fins


Regular color is brown Color customization is available

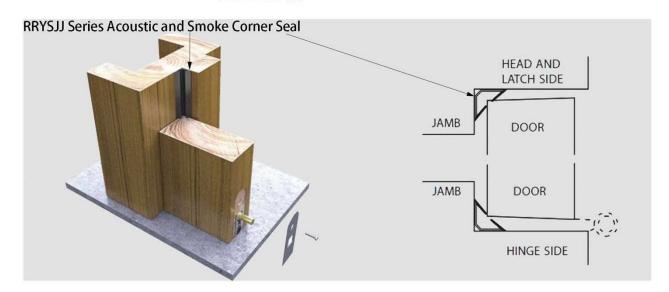



Rigid part is typically used to maintain shape and provide structural support, while soft part is utilized for sealing and flexibility, ensuring better adaptation to various surfaces and shapes.

This combination effectively prevents smoke from infiltrating indoors through door or window gaps, while ensuring durability and reliability in installation.

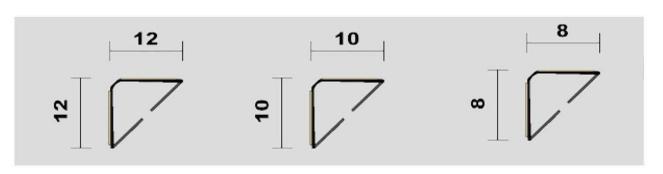



RSR SERIES SILICONE SMOKE SEAL FOR DOORS






RSR series smoke seal is manufactured of high temperature silicone rubber which is self-extinguishing It can be used on doors where require smoke protection.

Designed for tighter frames Demonstrates extremely low closing force Impervious to fungus and mildew

Function: Seal gaps to prevent smoke weather dust

Product comes with strong self-adhesive Length: 200m/roll and 2 rolls/carton

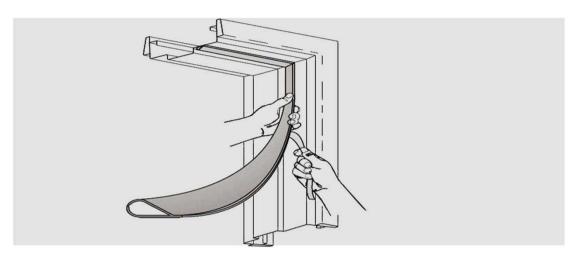





RSR is an adhesive-backed silicone gasket seal, it demonstrates extremely low closing force with excellent compression and the door latches easily.




It can be installed on the perimeter of door opening to slow and prevent the passage of smoke weather sound and dirt.

RSR SERIES SIZE CHART

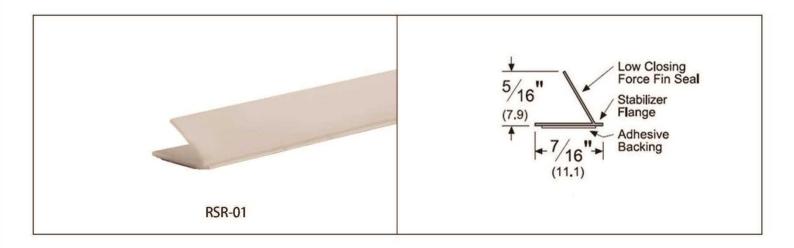

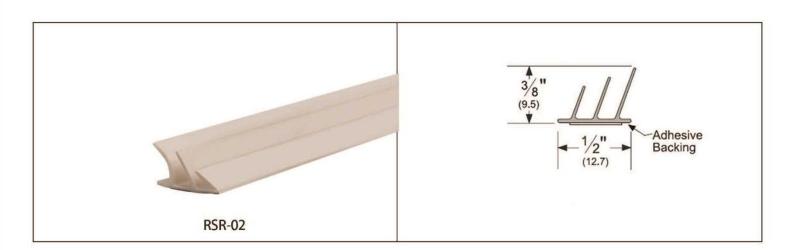

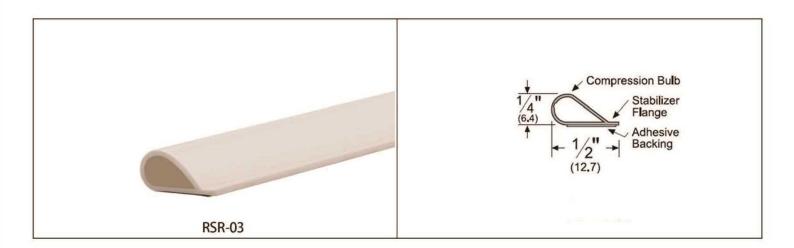



RG SERIES SEALING SYSTEMS FOR MINIMALIST GLASS DOORS

This sealing systems for minimalist glass doors is beautifully designed and easy to install without traditional glue fixing and no additional sealant. Made of environmentally friendly materials with a long service life, creating a healthy life.

Easy installation
Securely fixed without additional sealant
Long service life
Environmentally friendly materials
Attractive design

Color is optional brown white black grey






Innovative nesting design





Fits perfectly into a variety of decorating styles





RG SERIES SEALING SYSTEMS FOR MINIMALIST GLASS DOORS











































































RG SERIES SEALING SYSTEMS FOR MINIMALIST GLASS DOORS






































































RGDS-M SERIES MAGNETIC WATERPROOF SEAL FOR SHOWER DOOR

This water stopper is used for shower glass door, made of hard and soft PVC material, waterproof and sealed. And the strip has a magnetic model, the magnet has a variety of colors to choose from, more integrated into the decorative style. It can be used for glass thickness of 5 6 8 10 12mm to meet different size options.

High quality material, environmental health Hard plus soft PVC, strong waterproof performance Magnetic strip embedded, the door will not be popped open Multiple sizes and choices Can be integrated into different decoration styles






Suitable for multiple locations in the shower





Incorporate a variety of decorating styles



RGDS-M SERIES MAGNETIC WATERPROOF SEAL FOR SHOWER DOOR

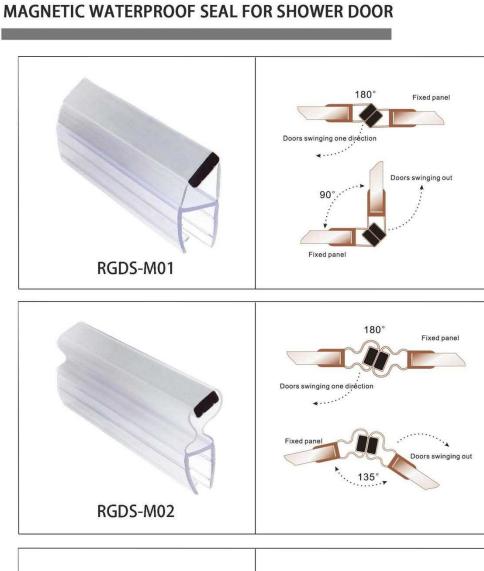




















5mm glass, 6mm glass 8mm glass, 10mm glass, 12mm glass
































5mm glass, 6mm glass 8mm glass, 10mm glass, 12mm glass








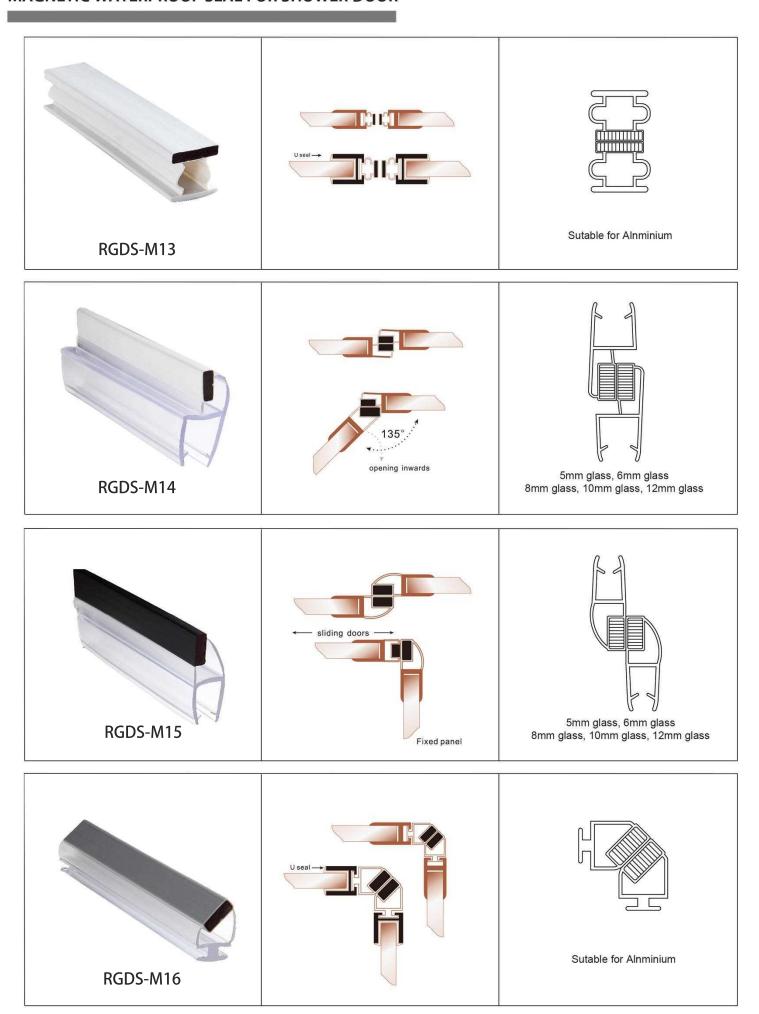









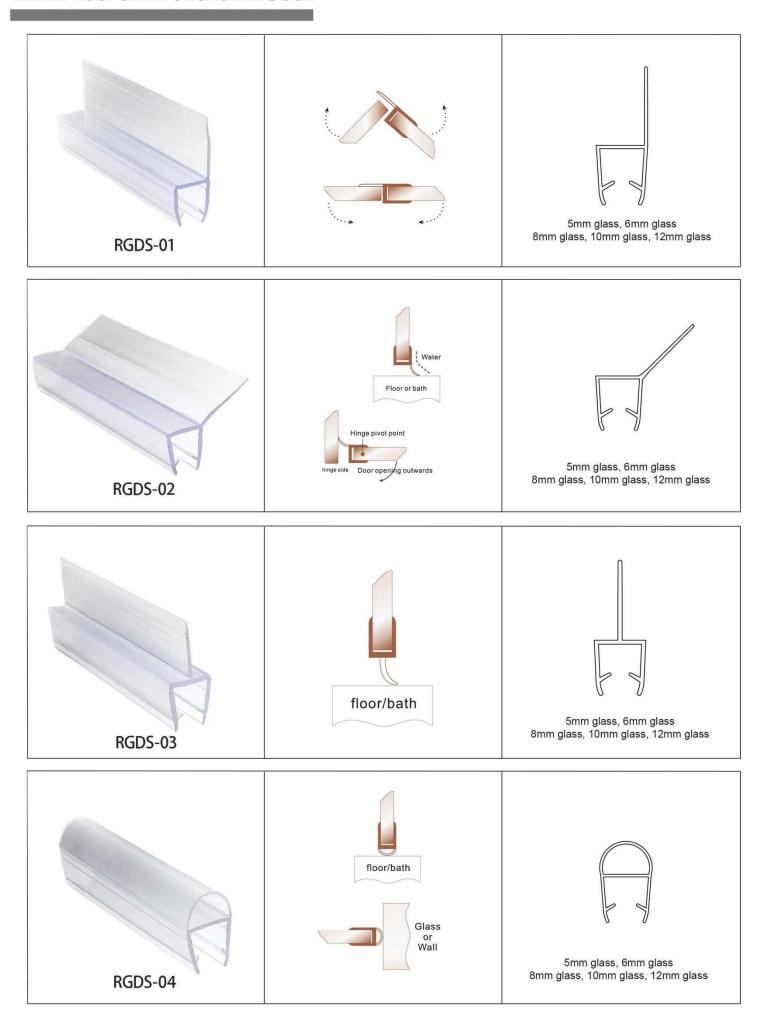



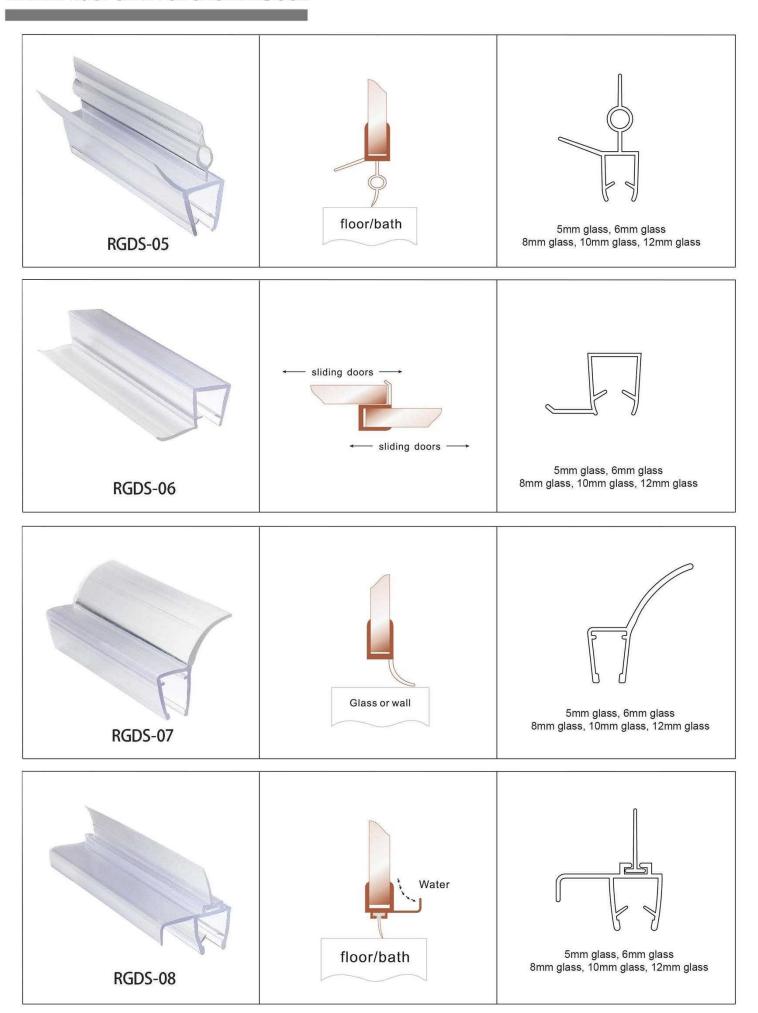




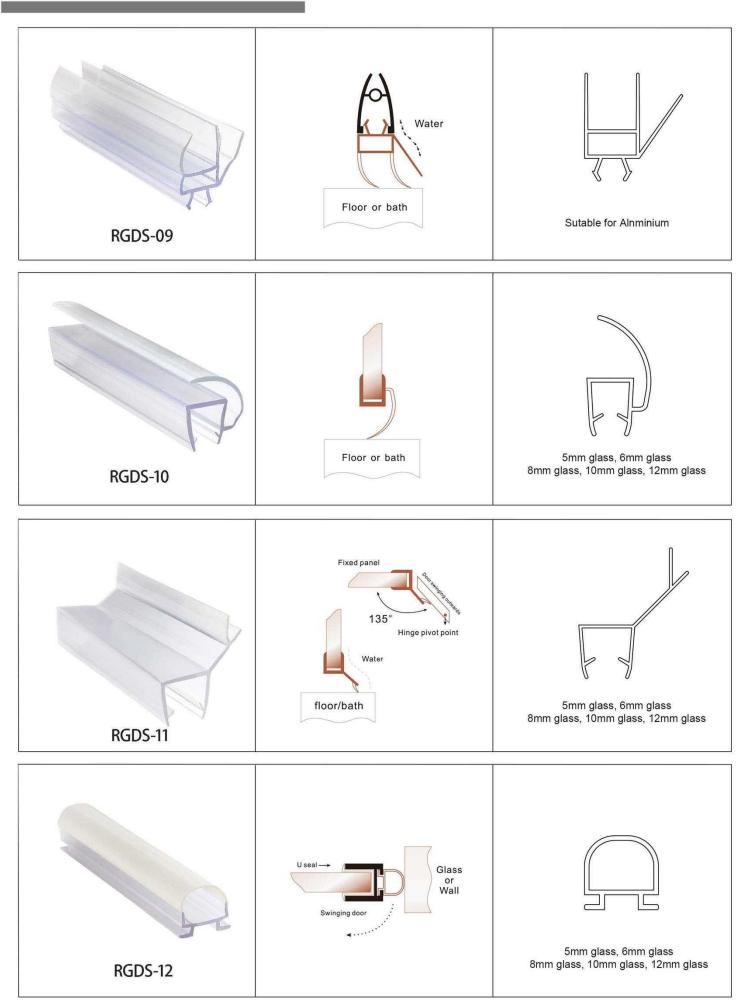










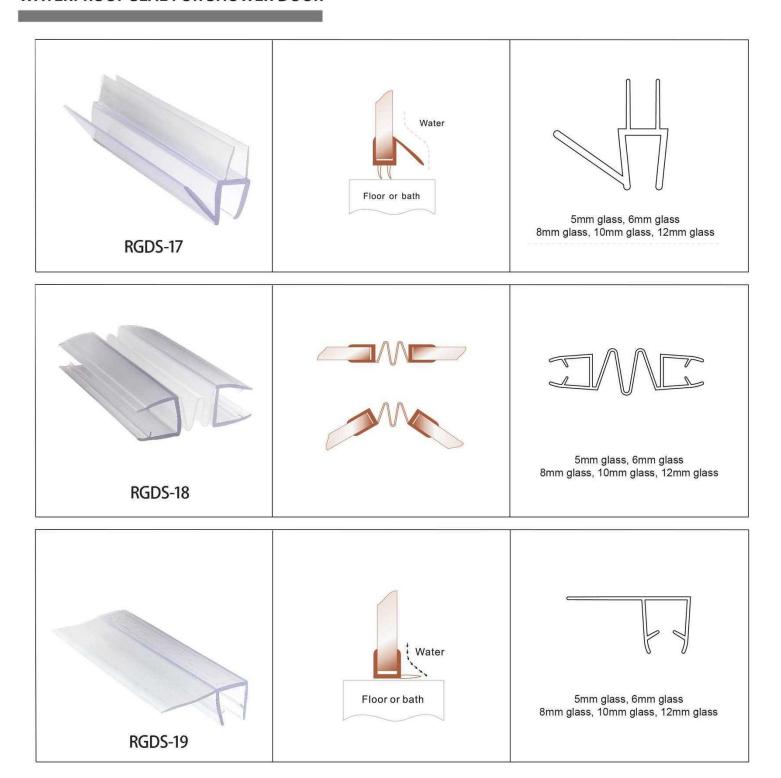



SEALS FOR ALUNIMUM DOOR










































































SEALS FOR ALUNIMUM DOOR












































































SEALS FOR ALUNIMUM DOOR











































































ALUMINUM DOOR AND WINDOW ANTI-COVER ADHESIVE STRIP

This series of aluminum doors and windows cover rubber strip, using high elasticity TPE rubber material exquisite and become, due to good elasticity, moderate hardness and softness, easy to install and not easy to fall off, to solve the hard PVC cover size on the market is difficult to control, a little bit too big is not easy to install, small and card is not tight and easy to fall off, the scrap rate is high, is the aluminum doors and windows of the ideal supporting products.

Made of high elasticity TPE rubber material Good elasticity, soft and hard, can effectively play its role Easy to install, solving the problem of difficult to control the size of rigid PVC cover plate Solve the problems of easy to fall off and high scrap rate


Color is optional brown white black grey 🔳 🔲 📕







Suitable for window mounting, good elasticity and not easy to fall off



Ideal complementary products for broken-bridge aluminum doors and windows



SEALS FOR WARDROBE SLIDING DOOR

Seals for wardrobe sliding door comes with backing, easy to install. Can also be used in cabinets, glass cabinets and other places, can effectively play the role of anti-collision and can play a sealing role, is one of the best choice of home sealing strip. Magnetic strips are soft material, so when the sliding door is closed, it will not be popped open due to the magnetic force of the magnetic strips, and it also plays the role of anti-collision.


Soft magnetic strip for safety and anti-collision Magnetism prevents the door from popping open when it is closed Sealing effect at the same time Self-adhesive backing, easy to install





















Slotted furring strips for effective dust protection



Can also be used in cabinets, glass cabinets and other places



With soft magnetic strip, it can play the role of anti-collision at the same time of sealing. bounced open when it is closed





SEALS FOR WARDROBE AND CABINET SWING DOOR

Seals for wardrobe and cabinet swing door is an excellent sealing material made of PVC, not only can effectively prevent dust, but also can be insect-proof, moisture-proof, anti-oil smoke, cabinet door sealing and so on. Easy to install, just measure the required length, cut the excess part, tear off the adhesive release paper and paste the dust seal to the side of the cabinet door.

Adhesive fixing part is hard PVC, sealing gap part is soft PVC
Dustproof, insect-proof
Moisture-proof, smoke-proof, and prevent the cabinet door from closing automatically
Excellent wear resistance, not easy to wear
Easy installation with strong self-adhesive








Measure the required length when installing, cut the excess part, and then




First Generation Dust Seal




Second Generation Dust Seal





SEALS FOR CUSTOMIZATION














































































SEALS FOR CUSTOMIZATION














































































SEALS FOR CUSTOMIZATION







































































SEALS FOR STEEL PURIFICATION DOOR BOTTOM

This steel purification door bottom seal has several styles and models to choose from, perfectly adapting to all size needs. The automatic lifting function returns to the intelligent life. Made of high-quality steel, it can insulate cold and heat, not only dustproof but also insect-proof. Sufficient thickness can also sound insulation and noise reduction.












Thermal insulation


Dust and insect repellent

Noise reduction

Automatic lifting







Made of high quality aluminum




Sound and noise reduction


INSULATION SEALING SOLUTION www.ressaseal.com



SEALS FOR STEEL PURIFICATION DOOR BOTTOM









- Housing is 6063 aluminum with 304 stainless steel fasteners and screws.
- 2. Silicone rubber seal as standard.
- 3. Round brass heads are standard.
- 4. Lengths: customized from 300 mm to 1500 mm.
- 5. Normal lengths 800 mm, 915 mm and 1000 mm 800 mm can be cut to 700 mm 915 mm can be cut to 800 mm 1000 mm can be cut to 900 mm.








- Housing is 6063 aluminum with 304 stainless steel fasteners and screws.
- 2. Silicone rubber seal as standard.
- 3. Round brass heads are standard.
- 4. Lengths: customized from 300 mm to 1500 mm.
- 5. Normal lengths 800 mm, 915 mm and 1000 mm 800 mm can be cut to 700 mm 915 mm can be cut to 800 mm 1000 mm can be cut to 900 mm.








- 1. Housing is 6063 aluminum with 304 stainless steel fasteners and screws.
- 2. TPE seals are used.
- 3. Round brass heads are standard.
- 4. Lengths: customized from 300 mm to 1500 mm.
- 5. Normal lengths 800 mm, 915 mm and 1000 mm 800 mm can be cut to 700 mm 915 mm can be cut to 800 mm 1000 mm can be cut to 900 mm.


INSULATION SEALING SOLUTION



SEALS FOR STEEL PURIFICATION DOOR BOTTOM










- Housing is 6063 aluminum with 304 stainless steel fasteners and screws.
- 2. TPE seals are used.
- 3. Round brass heads are standard.
- 4. Lengths: Custom lengths from 300 mm to 1500 mm are available.
- 5. Normal lengths 800 mm, 915 mm and 1000 mm 800 mm can be cut to 700 mm 915 mm can be cut to 800 mm 1000 mm can be cut to 900 mm.









- Housing is 6063 aluminum with 304 stainless steel fasteners and screws.
- 2. TPE seals are used.
- 3. Round brass heads are standard.
- 4. Lengths: Custom lengths from 300 mm to 1500 mm are available.
- 5. Normal lengths 800 mm, 915 mm and 1000 mm 800 mm can be cut to 700 mm 915 mm can be cut to 800 mm 1000 mm can be cut to 900 mm.







- Housing is 6063 aluminum with 304 stainless steel fasteners and screws.
- 2. TPE seals are used.
- 3. Round brass heads are standard.
- 4. Lengths: Custom lengths from 300 mm to 1500 mm are available.
- 5. Normal lengths 800 mm, 915 mm and 1000 mm 800 mm can be cut to 700 mm 915 mm can be cut to 800 mm 1000 mm can be cut to 900 mm.

INSULATION SEALING SOLUTION



SEALS FOR STEEL DOOR

This slot door frame sealing strip seal has several styles and models to choose from, perfectly adapting to all size needs. Made of high quality material, it can insulate cold and heat, suitable for the hospital environment, not only dustproof but also anti-insects. Sufficient thickness can also sound insulation and Dust and insect repellent noise reduction, providing a quiet environment for hospital rooms.

Thermal insulation

Suitable for hospitals and other sterile environments High quality material, environmental protection and health Thickness guarantee, strong sealing performance Various sizes and options Effectively prevent dust from entering Material can prevent insects











Various styles to choose from





Suitable for hospital dust and insect control


SEALS FOR STEEL DOOR

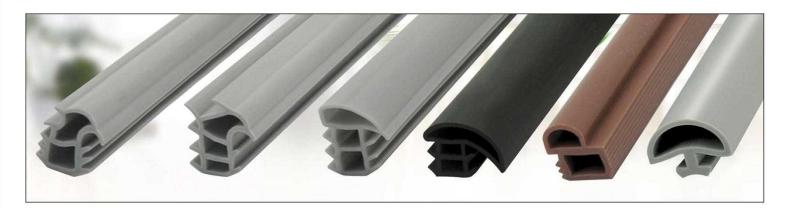










































INSULATION SEALING SOLUTION www.ressaseal.com





SEALS FOR STEEL DOOR

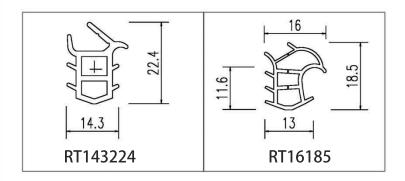


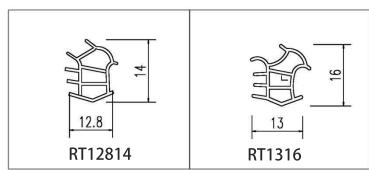


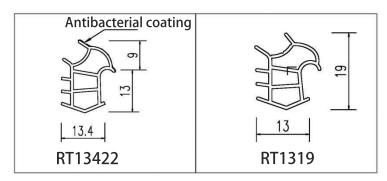


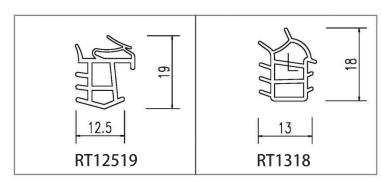

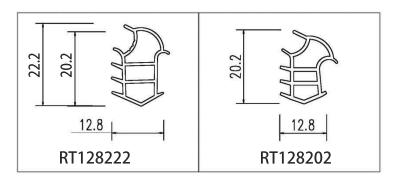

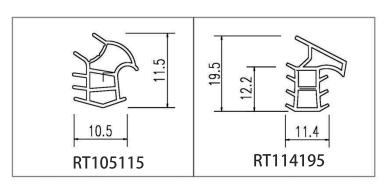

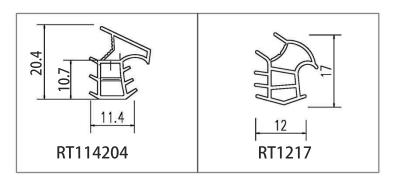



INSULATION SEALING SOLUTION

Contact Us



Contact Us

We appreciate your interest in our products. For inquiries and further information please reach out to us through the following channels

Tel./WhatApp:0086-18845111091

Email: sales@ressatech.com

☑ Website: www.ressaseal.com

Follow us on social media for the latest product updates!

Facebook: https://www.facebook.com/ressaseal

Youtube: https://www.youtube.com/@Ressaintumescentseal

LinkedIn: https://www.linkedin.com/company/ressaintumescnetseal

Instagram: https://www.instagram.com/ressaseal/

Twitter: https://x.com/ressaseal

pinterest: https://www.pinterest.com/ressaintumescentseal/

Tiktok: https://www.tiktok.com/@intumescentsealressa

We look forward to assisting you!

INSULATION SEALING SOLUTION www.ressaseal.com